


SEGREGATED CONCRETE / EXTERNAL HONEYCOMBS

SOUND CONCRETE

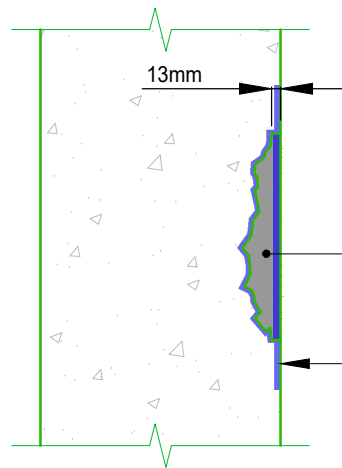


13mm

PENETRON V/O PATCH
applied in layers of 13-50mm

PENECRETE MORTAR™ applied in layers of 13mm up to 50mm.

PENETRON® SLURRY COAT @1.4 Kg/Sqm

OPTION 1

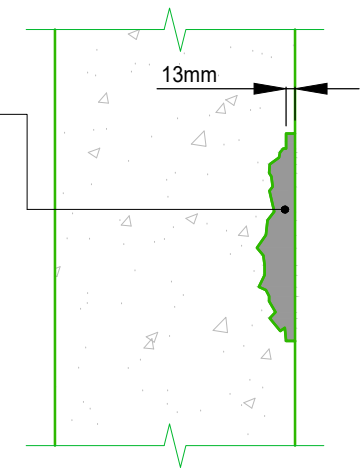

OPTION 2



REPAIRING OF DRY HONEYCOMBED OR CHIPPED AREAS		TYPICAL DETAIL
DWG: PDN023	PENECRETE MORTAR AND PENETRON COATING OR - V/O PATCH	PENETRON AUSTRALIA SUITE 3, 49 HEATHCOTE ROAD MOOREBANK, NSW, 2170 AUSTRALIA
REVISION: 01		
DATE: 06/04/2020	DRAWING NOT TO SCALE	COPYRIGHT OF PENETRON AUSTRALIA